


SPARK TESTER: ENSURE THE QUALITY OF CABLE JACKETS AND INSULATIONS

Powered To Perform

The new Spark Tester generation accurately maintains test voltage under any condition including highest capacitive loads.

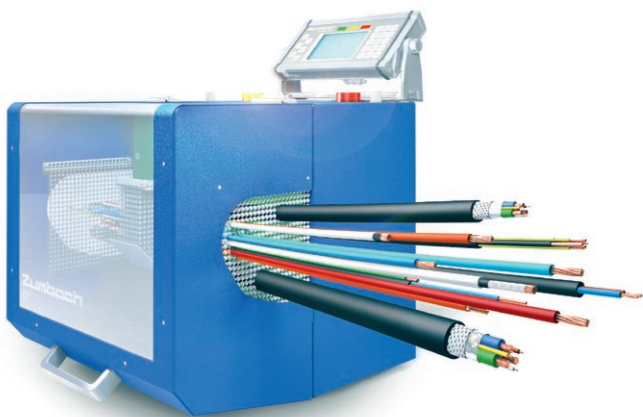

- Shortest recovery time after disruptive breakdown
- Pin hole and bare patch detection
- Controlled, adjustable test voltage of up to 28 kVDC / 15 kVAC
- Complete range of electrodes
- Compliance with several standards including IEC 62230, UL 1581, UL 2556



Learn more about the
Spark Tester Family

Zumbach

SWISS PRIME MEASURING SINCE 1957

ZUMBACH Electronics
sales@zumbach.ch | www.zumbach.com